

2020 TUNDRA LT

PACKAGE HIGHLIGHTS

- Running boards with large openings
- REV-XU™ platform
- SC™-5U articulating rear suspension with locking mechanism on one side (no tool required)
- 16 x 154 x 1.5 in. Charger track
- Lynx Telescopic front suspension
- Pilot™ DS 2 skis
- Brembo brake with braided stainless-steel brake line
- Analog gauge with display
- Electric start
- HPG™ rear shock
- Low oil light
- Rack & Hitch

EXTRA HIGHLIGHTS

- 600 ACE™
- iTC™ Engine mapping modes (Standard, Sport or ECO®)
- Reversible throttle lever (thumb or finger activated)
- Extended heat exchanger for better cooling capacity
- Engine oil cooler
- RF D.E.S.S.™ key
- Air radiator with fan



TUNDRA™ LT 550 Fan shown

ROTAX® ENGINE

	550 Fan	600 ACE™
Engine details	Axial fan-cooled, cylinder reed porting	Liquid-cooled, four-stroke D.O.H.C., dry sump
Cylinders	2	2
Displacement	553.4 cc / 33.8 in. ³	600 cc / 36.6 in. ³
Bore	76 mm / 3 in.	74 mm / 2.9 in.
Stroke	61 mm / 2.4 in.	69.7 mm / 2.7 in.
Maximum engine speed	6,800 RPM	7,250 RPM
Carburation	2X VM-30	EFI
Recommended fuel type	Regular unleaded	Regular unleaded
Minimum octane	87	87
Fuel tank	40 L / 10.6 US gal	40 L / 10.6 US gal
Oil tank capacity	3.7 L / 3.9 qt	2.1 L / 2.2 qt

COLOR

Sunburst Yellow 

DIMENSIONS

Vehicle overall length	3,247 mm / 127.8 in.
Vehicle overall width	1,002 mm / 39.4 in.
Vehicle overall height	1,278 mm / 50.3 in.
Ski stance	813 mm / 32 in.
Ski overall length	1,049 mm / 41.3 in.
Track nominal width	406 mm / 16 in.
Track nominal length	3,923 mm / 154 in.
Track profile height	38.1 mm / 1.5 in. Charger

SUSPENSION

Front suspension	LTS
Front shock	Motion Control
Front suspension max. travel	150 mm / 5.9 in.
Rear suspension	SC™-5U
Center shock	Motion Control
Rear shock	HPG™
Rear suspension max. travel	239 mm / 9.4 in.

POWERTRAIN

Drive clutch type	eDrive™ 2	eDrive™ 2
Driven clutch type	QRS (short shaft)	QRS (short shaft)
Engagement	2,600 RPM	2,200 RPM
Small sprocket number of teeth	19	21
Large sprocket number of teeth	45	51
Drive sprocket number of teeth	8	8
Drive sprocket diameter	183 mm / 7.2 in.	183 mm / 7.2 in.
Brake system	Brembo brake with braided stainless-steel brake line	Brembo brake with braided stainless-steel brake line

DRY WEIGHT

222 kg / 488 lb	235 kg / 517 lb
-----------------	-----------------

FEATURES

Frame	REV-XU™	Starter	Electric	Mirrors	Optional
Skis	Pilot™ DS 2	Reverse	RER™ (550 Fan) Mechanical (600 ACE™)	Windshield	394 mm / 15.5 in.
Seating	Low profile 2-up	Heated throttle lever	Standard	Runner	Square 3/8
Handlebar	Straight aluminum with J-hooks / Grab handle	Heated grips	Standard	Carbide configuration	102 mm / 4 in. at 90°
Riser block height	205 mm / 8.1 in.	Gauge	Analog with display	Hitch	Tongue Type



TUNDRA™ LT 600 ACE™ shown



TUNDRA™ LT 600 ACE™ shown

FEATURE HIGHLIGHTS




Low profile 2-up seat

Capable of seating two riders for trip up the mountain, yet low profile for clearance when boondocking solo.



Finger throttle position (600 ACE™)

Throttle block can be rotated to be used as either a traditional thumb throttle or unique finger throttle.

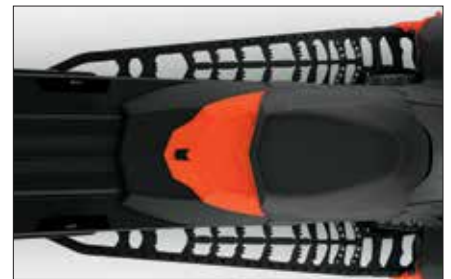

Running boards with large openings

Massive, strategically shaped openings keep the boards clear. A tall extruded edge adds stiffness and has aggressive boot grips.



Lightweight aluminum rack

50 pound (23 kg) cargo capacity.



SC™-5U articulating rear suspension

Features settings that maximize deep snow traction in reverse or lock out for towing.

GAUGE FEATURES

Speedometer	Standard
Tachometer	Standard
Fuel	Standard
Engine temperature	Optional (600 ACE™), N/A (550 Fan)